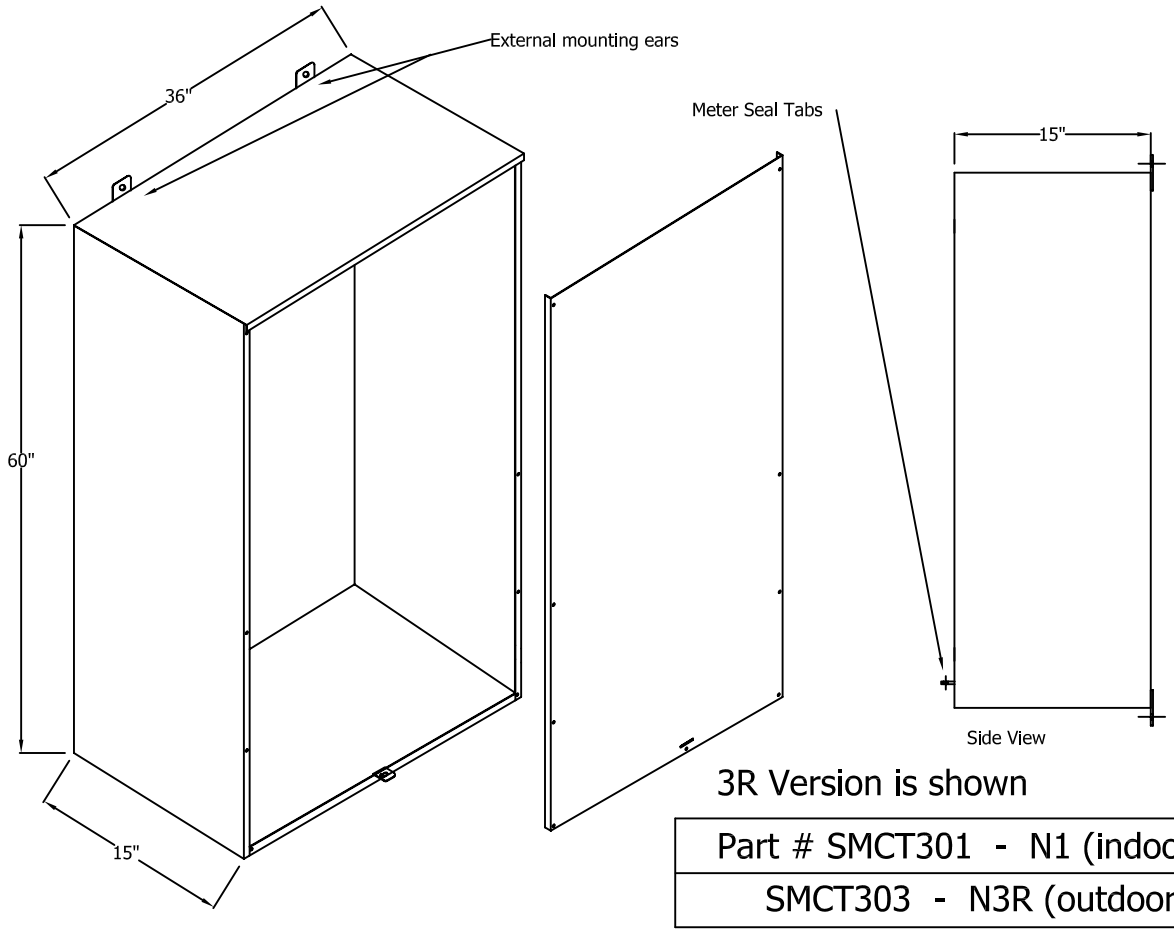

3R Version is shown

Part # SMCT301 - N1 (indoor)
SMCT303 - N3R (outdoors)

SMECO 1000 - 2000 Amp CT Cabinet

- CT cabinets are constructed with all welded seams. Material is 12ga. galvanized sheet steel, conforming with ASTM A-924 & G90-U.
- In instances where a painted finish is required, Galvannealed steel, ASTM A653 & G60-U will be used.
- NEMA 1 boxes are provided with screw covers, rear mounting holes, and meter seal tabs.
  NEMA 3R boxes are provided with gasketed screw covers, external mounting ears and meter seal tabs.
- Total custom capability allows us to meet a wide range of customer needs. We can supply special sizes, shapes, holes, or cutouts.
- NEMA 1 / 3R CT Cabinets are UL listed.

Note: When mounting cabinet, long dimension should be in the direction of wire pull.
Line and load must not be in the same quadrant of cabinet.
Any necessary changes must be pre-approved by Southern Maryland Electric Meter Department prior to any install.

DWG. TITLE:	SMECO - Standard Construction 1000-2000A CT Cabinet
DWG. NO.:	P10091
MATERIAL:	ASTM A924 Galvanized G90-U ASTM A653 Galvanealed G60-U
FINISH:	Galvanized - N/A Galvanealed - Customer to Specify

NOTICE:
THIS INFORMATION IS THE PROPERTY OF N.J. SULLIVAN CO., ANY REPRODUCTION, PUBLICATION OR DISTRIBUTION TO A THIRD PARTY IS STRICTLY FORBIDDEN UNLESS WRITTEN PERMISSIONS ARE GIVEN BY AN AUTHORIZED AGENT OF:
N.J. SULLIVAN CO., INC.

DFTG.:	CD	DATE: 07/01/10
CHKR.:		DATE:
REV.:		DATE:
REV.:		DATE:
REV.:		DATE:

N.J. SULLIVAN Co.
INCORPORATED
P.O. BOX 438, STERLING, VIRGINIA 20167
METAL FABRICATION
Phone: (703)-464-5944 Fax: (703)-464-5992
www.njsullivan.com